

A simple gate for linear optics quantum computing

Terry Rudolph and Jian-Wei Pan

Institut für Experimentalphysik, Universität Wien, Boltzmannngasse 5, Vienna, Austria

We describe a simple scheme for implementing the non-linear sign gate of Knill, Laflamme and Milburn (Nature, **409**, 46-52, Jan. 4 (2001)) which forms the basis of an experiment underway at the University of Vienna.

It was recently shown [1] that efficient quantum computing is possible using only linear optics, single photon sources and single photon detectors. One of the fundamental gates of the proposed scheme is known as the non-linear sign (NLS) gate; it is a non-deterministic gate which implements the transformation (on states of photon occupation number) given by

$$\alpha|0\rangle + \beta|1\rangle + \gamma|2\rangle \rightarrow \alpha|0\rangle + \beta|1\rangle - \gamma|2\rangle, \quad (1)$$

with probability of success $1/4$.

The scheme suggested in [1] for implementing a NLS gate used a complicated interferometer requiring beam-splitters of variable reflectivity. We have found a scheme more amenable to an experimental demonstration of linear optics quantum computing, and it is depicted in Fig. 1. The input computational mode begins in a state of horizontal polarization, i.e. in general $|\psi_{in}\rangle = \alpha|0_H\rangle + \beta|1_H\rangle + \gamma|2_H\rangle$. This mode passes through a polarization rotator, of rotation angle σ . As with the proposal of [1], our scheme makes use of a single ancilla photon, in this case prepared with vertical polarization. The ancilla photon and computational mode are mixed at a polarizing beamsplitter (PBS). One output of the PBS goes to a detector D_1 , and the gate's success is conditioned on no photons being detected at D_1 . The other output mode of the PBS passes through a polarization rotator set to an angle θ . This mode is subsequently subjected to a measurement, and the gate operation is successful if a single vertical photon is detected. This is indicated in the figure by the addition of a second PBS and detector D_2 . In general the detector D_2 would need to be able to distinguish one from multiple photons, and such detectors are not readily available. However for the purposes of a 4 photon coincidence experiment such multiple photon events are excluded by the conditioning process, and so a simple demonstration of an NLS gate can be performed using commonly available single photon detectors.

If we take the transformation corresponding to a polarization rotator of angle x to be $a_H^\dagger \rightarrow \cos x a_H^\dagger + \sin x a_V^\dagger$, $a_V^\dagger \rightarrow -\sin x a_H^\dagger + \cos x a_V^\dagger$, then the (unnormalized) state of the output mode, given the correct conditioning at D_1, D_2 , is [2]

$$|\psi_{out}\rangle = \alpha \cos \theta |0_H\rangle + \beta \cos \sigma \cos 2\theta |1_H\rangle + \gamma \cos^2 \sigma \cos \theta (1 - 3 \sin^2 \theta) |2_H\rangle. \quad (2)$$

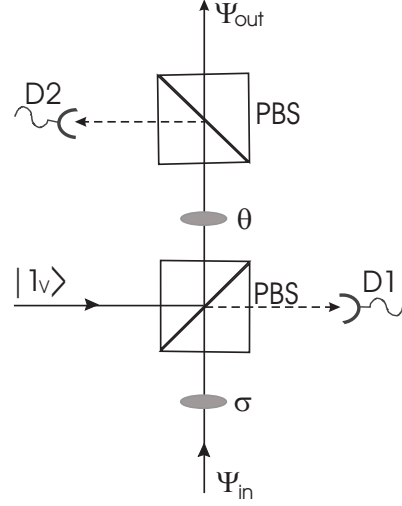


Fig.1. A simple scheme for implementing a NLS gate

Defining $A = \sqrt{21 - 7\sqrt{2}}/7$, one can easily show that choosing the angles $\theta = \arccos A \approx 61.5^\circ$ and $\sigma = \arccos((1 - 2\sqrt{2})A) \approx 150.5^\circ$, gives the desired transformation (1) with probability of success $A^2 \approx 0.227$. This is slightly lower than the probability of success (0.25) for the scheme presented in [1], however the experimental simplification of our scheme is considerable. Furthermore the central result of [1], namely that this probability of success can be boosted arbitrarily close to 1 using only linear optics, single photon sources and single photon detectors, is unaffected by this small decrease in success probability of the NLS gate.

This work was supported by the Austrian Science Foundation FWF, and the TMR programs of the European Union Project No. ERBFMRXCT960087.

Note added. Recently a similar simplification of the NLS gate was presented [3] which shares the same probability of success as the one presented here. The scheme presented here enjoys the slight practical advantage of not requiring a beamsplitter with unequal reflectivity/transmittivity.

-
- [1] E. Knill, R. Laflamme and G. Milburn, Nature, **409**, 46-52, Jan 4 (2001).
 - [2] A Maple worksheet capable of calculating the state transformations associated with arbitrary linear optical interferometers (incorporating both spatial and polarization degrees of freedom) is available from T.R. on request.
 - [3] T. Ralph *et. al.*, quant-ph/0108049.